
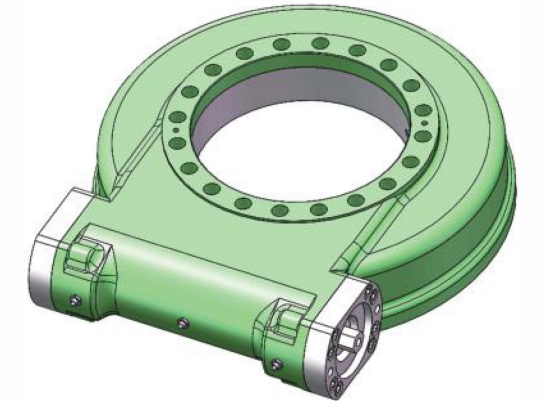
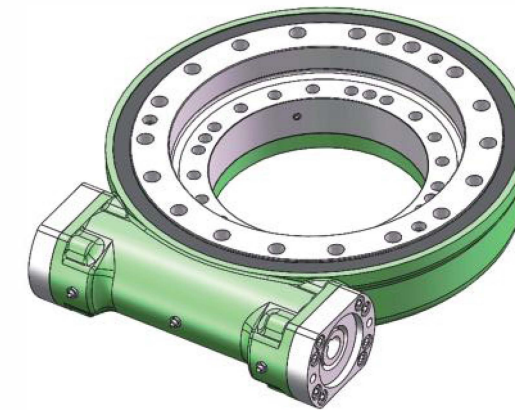


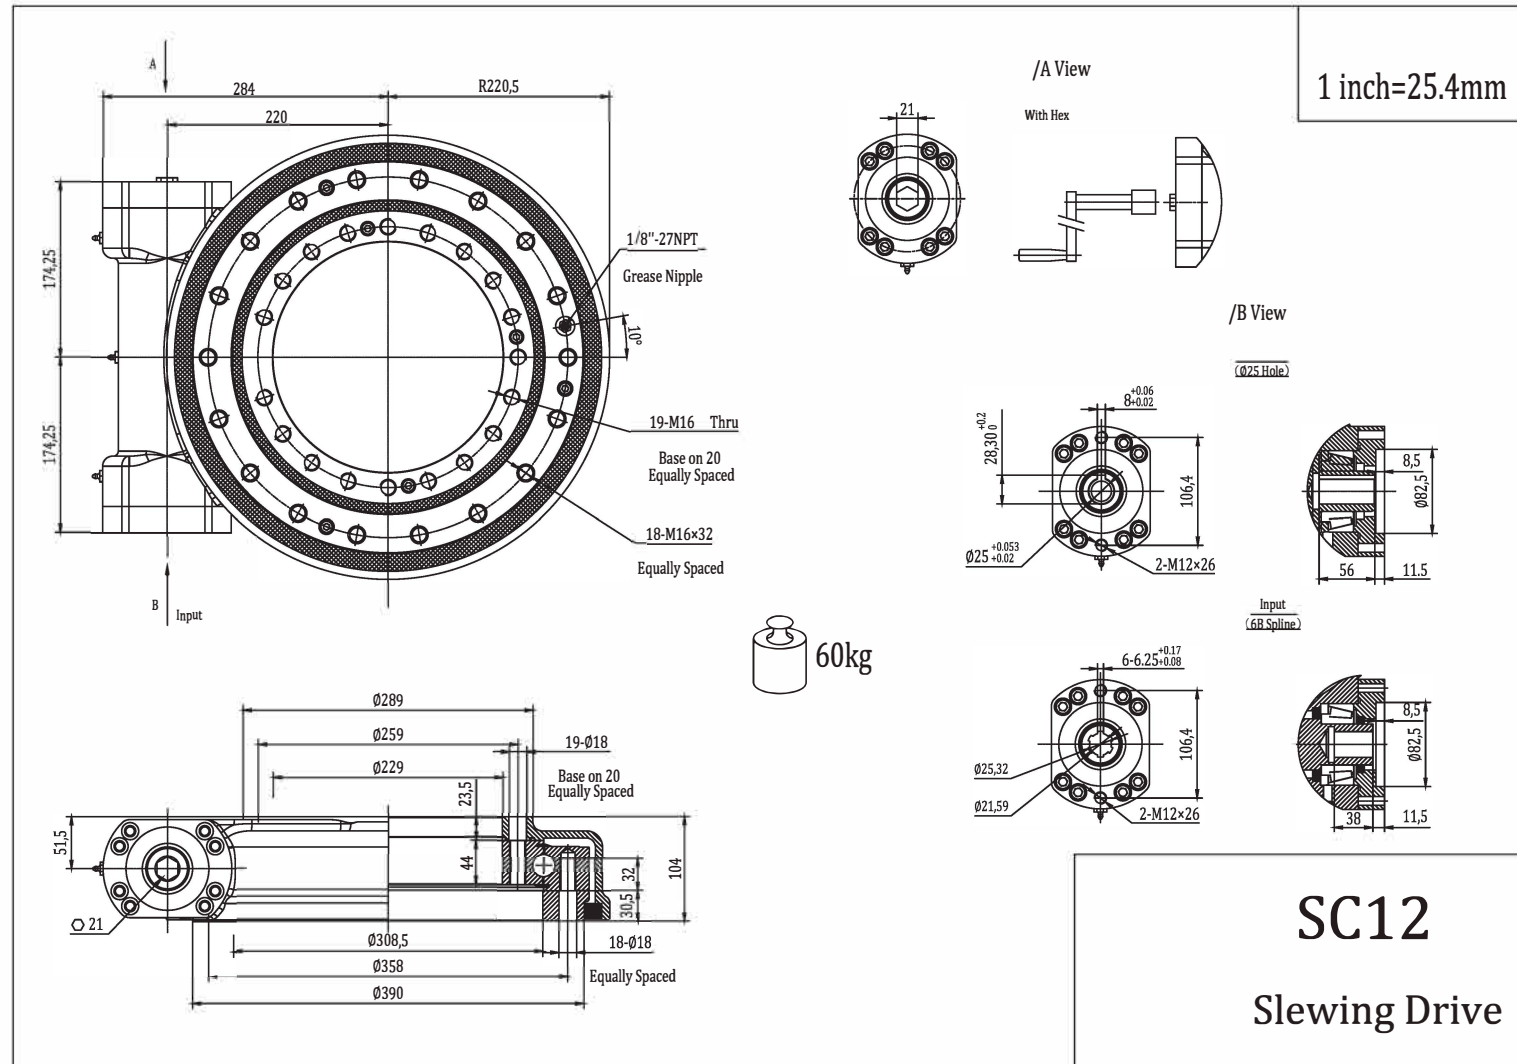


SC12 Slewing Drive Performance Parameters

Gear Ratio	78:1	
Output Torque (max.)	15.6 kN.m	11.5×10 ³ lbf.ft
Tilting Moment (max.)	54.3 kN.m	40×10 ³ lbf.ft
Holding Torque	43 kN.m	31.7×10 ³ lbf.ft
Static Axial Load Rating	475 kN	106.8×10 ³ lbf
Static Radial Load Rating	190 kN	42.7×10 ³ lbf
Mechanical Efficiency	40%	
Self-locking	Reliable static self-locking	
Precision	≤0.2°	
IP Class	IP65	

MOMENT LOAD CHART

Axial Load & Tilting Moment

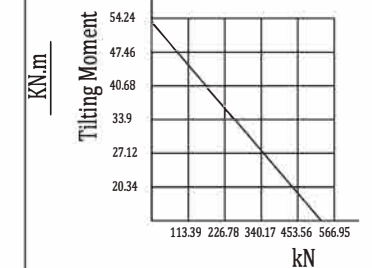

Axial Load