
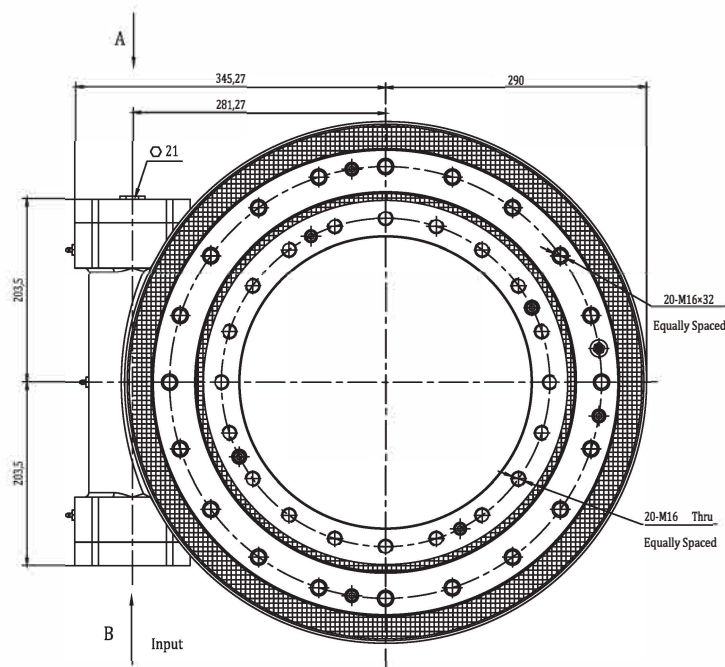


/A View


With Hex

1 inch=25.4mm



/B View




Input
(Ø25 Hole)





Input
(6B Spline)



98 kg

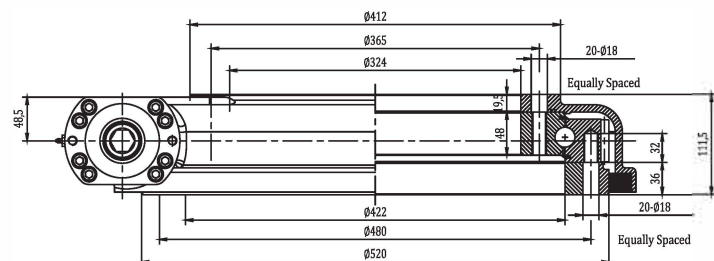

SC17
Slewing Drive

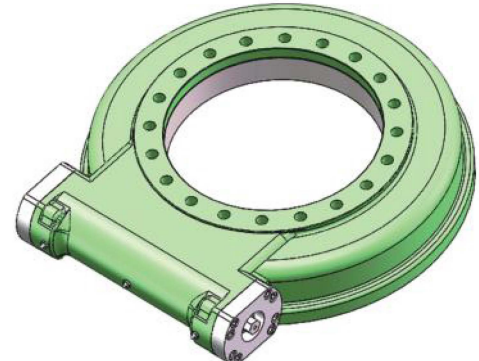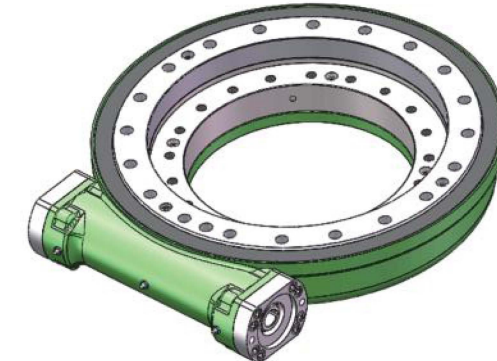

SC17 Slewing Drive Performance Parameters

Gear Ratio	102:1	
Output Torque (max.)	20.4 kN.m	15.1×10 ³ lbf.ft
Tilting Moment (max.)	135.6 kN.m	100×10 ³ lbf.ft
Holding Torque	72.3 kN.m	53×10 ³ lbf.ft
Static Axial Load Rating	970 kN	218×10 ³ lbf
Static Radial Load Rating	390 kN	88×10 ³ lbf
Mechanical Efficiency	40%	
Self-locking	Reliable static self-locking	
Precision	≤0.2°	
IP Class	IP65	

MOMENT LOAD CHART

Axial Load & Tilting Moment

