

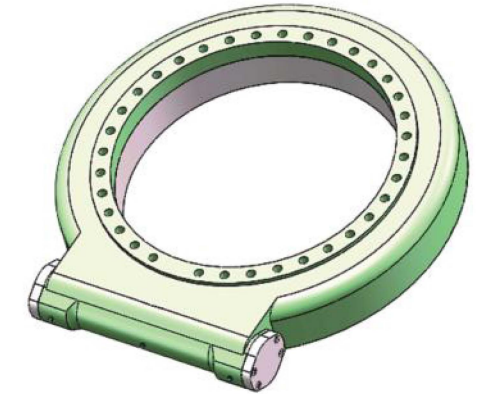


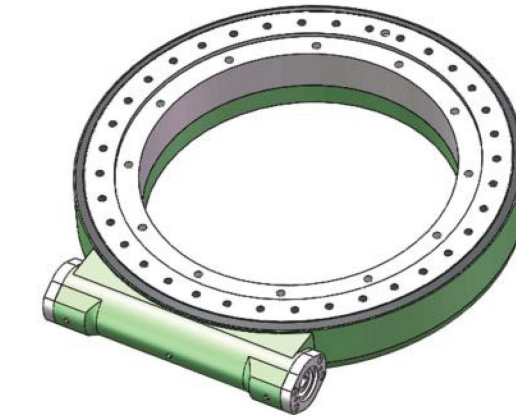

SC32 Slewing Drive Performance Parameters

Gear Ratio	154:1	
Output Torque (max.)	32 kN.m	23.6×10 ³ lbf.ft
Tilting Moment (max.)	347 kN.m	256×10 ³ lbf.ft
Holding Torque	190 kN.m	140×10 ³ lbf.ft
Static Axial Load Rating	3021 kN	680×10 ³ lbf
Static Radial Load Rating	1210 kN	272×10 ³ lbf
Mechanical Efficiency	40%	
Self-locking	Reliable static self-locking	
Precision	≤0.2°	
IP Class	IP65	

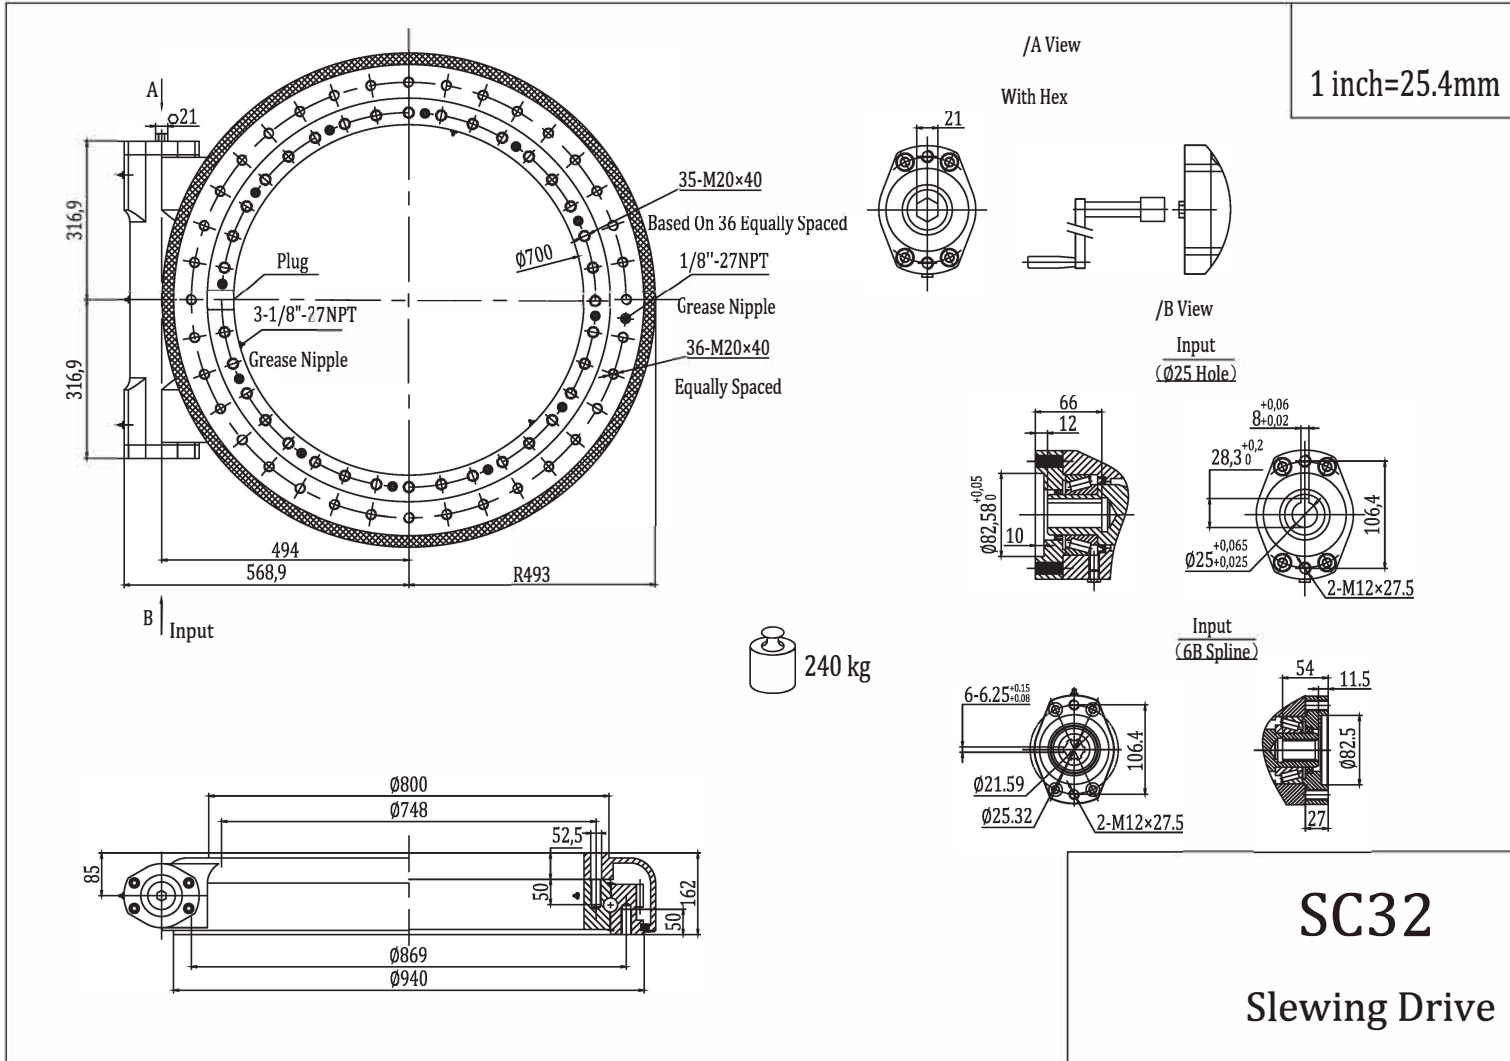