
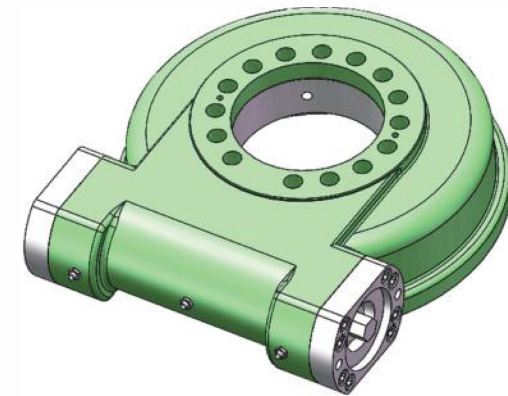
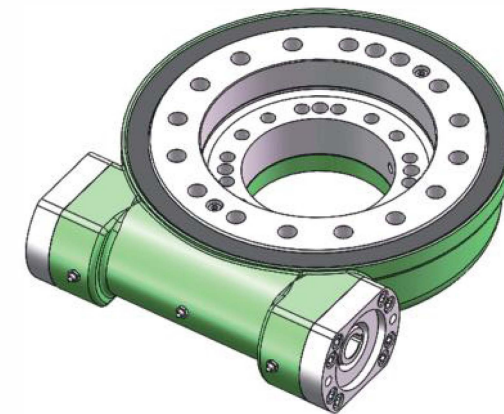


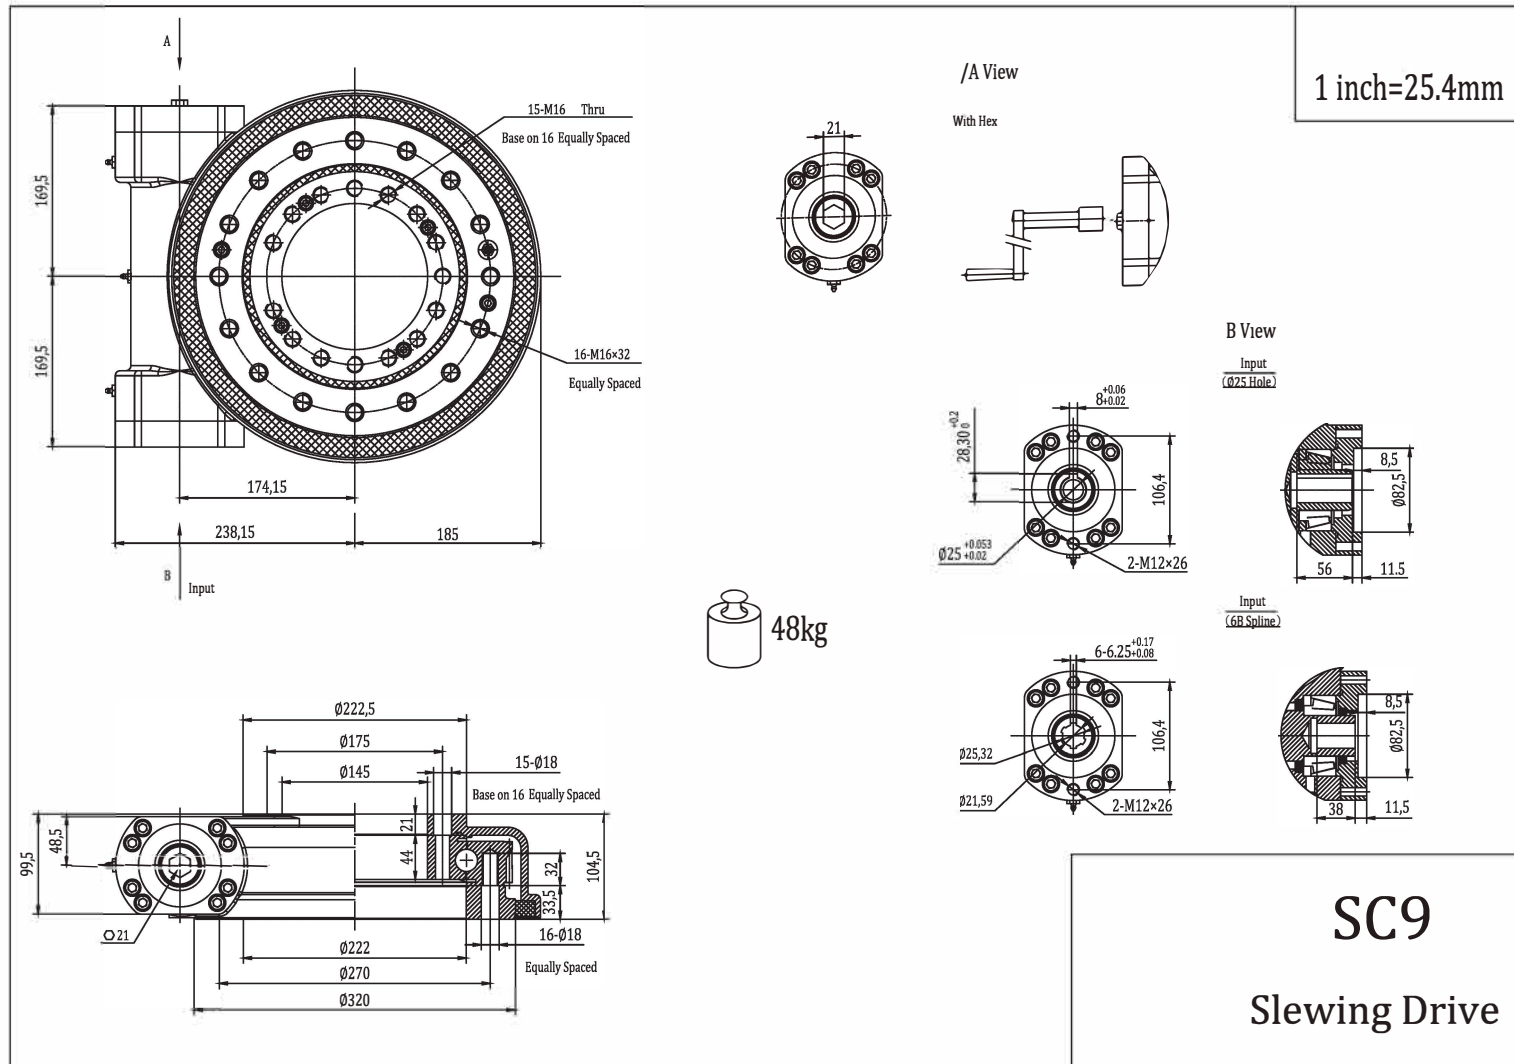

SC9 Slewing Drive Performance Parameters

Gear Ratio	61:1	
Output Torque (max.)	12.2 kN.m	9.0×10 ³ lbf.ft
Tilting Moment (max.)	33.9 kN.m	25×10 ³ lbf.ft
Holding Torque	38.7 kN.m	28.5×10 ³ lbf.ft
Static Axial Load Rating	338 kN	20.3×10 ³ lbf
Static Radial Load Rating	135 kN	15.9×10 ³ lbf
Mechanical Efficiency	40%	
Self-locking	Reliable static self-locking	
Precision	≤0.2°	
IP Class	IP65	

MOMENT LOAD CHART

Axial Load & Tilting Moment

