


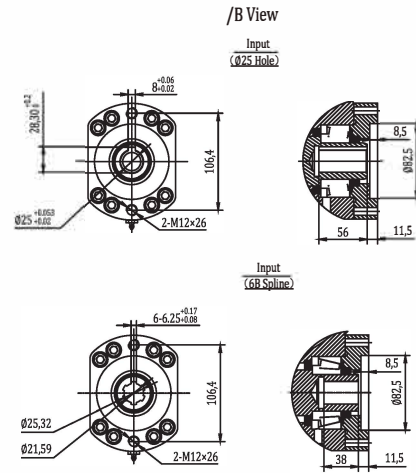




Input
(68 Spline)


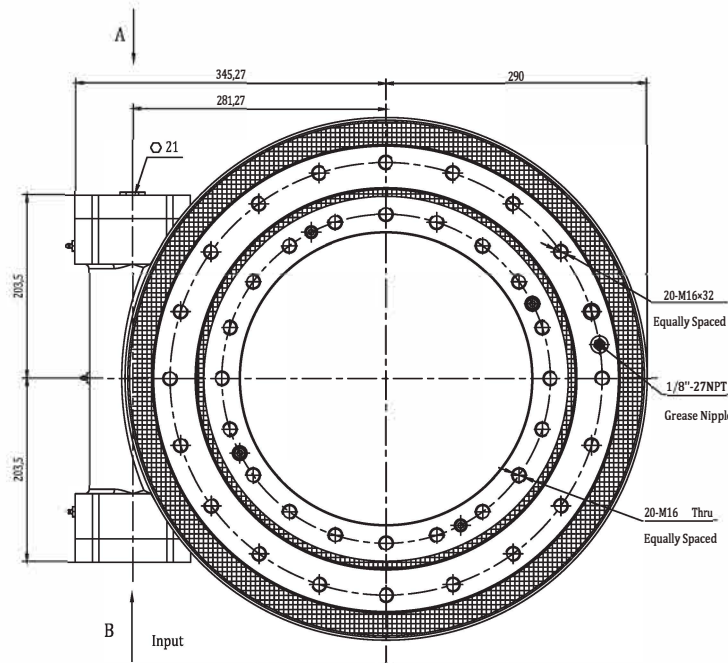


98 kg

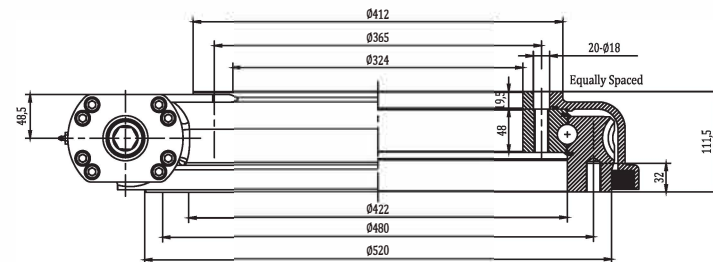

1 inch=25.4mm

WH17 Slewing Drive

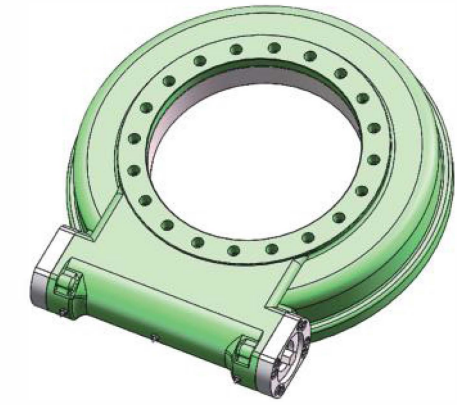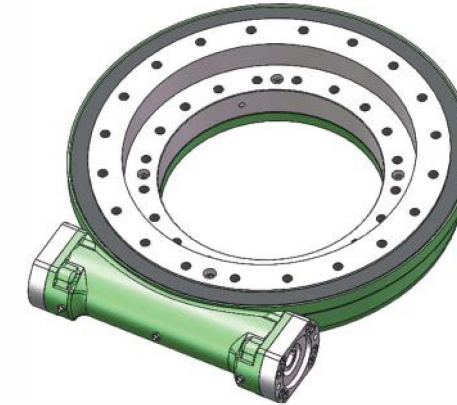


WH17 Slewing Drive Performance Parameters

Gear Ratio	102:1	
Output Torque (max.)	26.5 kN.m	19.6×10 ³ lbf.ft
Tilting Moment (max.)	178.3 kN.m	132×10 ³ lbf.ft
Holding Torque	88.2 kN.m	65.1×10 ³ lbf.ft
Static Axial Load Rating	1130 kN	254.2×10 ³ lbf
Static Radial Load Rating	452 kN	101.7×10 ³ lbf
Mechanical Efficiency	40%	
Self-locking	Reliable static self-locking	
Precision	≤0.2°	
IP Class	IP65	

MOMENT LOAD CHART

Axial Load & Tilting Moment

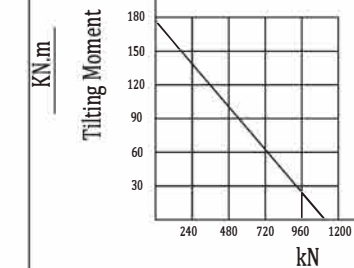

Axial Load